



SCC600A

SANY Crawler Crane 60 Tons Lifting Capacity

Quality Changes the World



Crawler Crane Series
SCC600A

P03	Main Characteristics	<ul style="list-style-type: none">▪ Operator's cab▪ Upperworks▪ Lowerworks▪ Operating Equipment▪ Safety Device
P09	Technical Parameters	<ul style="list-style-type: none">▪ Major Performance & Specifications▪ Outline Dimension▪ Transport Dimension▪ Transport Plan
P17	Boom Combination	<ul style="list-style-type: none">▪ H Configuration▪ FJ Configuration



SCC600A
SANY CRAWLER CRANE
60 TONS LIFTING CAPACITY

QUALITY CHANGES THE WORLD

Main Characteristics

- Page 04 Operator's cab
- Page 05 Upperworks
- Page 06 Lowerworks
- Page 06 Operating Equipment
- Page 07 Safety Device

Operator's cab



Operating Comfort

- Fully-enclosed steel frame structure is adopted, and the front, side, and the top of the cab are installed with large high-strength tempered glass, which admits sufficient light. The operator's cab is bright with ample space, providing wider view and isolates noise in a better way. Multimode and multilevel adjustable suspension seat is mounted with minimum vibration and noise, bringing the most comfortable driving experience for the operator. Air conditioning and heater are designed to ensure the perfect temperature for operator. Better man-machine interactive interface are realized through integrated 10.4-inch touch screen, programmable key switch and optional vibrating handle. On the left console mounted swing control handle, control buttons, emergent stop, radio and A/C panel; on the right console mounted three independent one-axis handles controlling winches, and two one-axis travel handles, as well as ignition, engine throttle and crawler telescoping buttons. The total layout is more human-friendly.

Closed Circuit Monitoring System

- The screen can at most present four pictures on one page, showing the wire rope reeving on each winch, surroundings behind counterweight and environment around the machine.

Upperworks



Engine

- Model: Isuzu 6HK1 (Tier III)
- Rated power: 212 Kw/2000rpm;
- Total displacement: 7.79L;
- Max. torque :1080 N·m /1500rpm.

Electrical Control System

- SYIC-2 integrated control system independently developed is adopted to ensure high system integration and accurate operation. The control system mainly includes power system, engine system, main control system, LMI system, auxiliary and safety monitoring system.
- Main electrical components are from internationally or industrially well-known brands, which can perform stably in such bad environment as in severe low or high temperature, plateau, and sandstorms.
- The controller, monitor, and the engine communicates through CAN Bus.

Hydraulic System

- The main pump is piston pump with variable displacement, and winch motors are piston motor of limitless adjustable displacement, providing higher operation speed. The positive flow hydraulic system is adopted, which can save more energy and boost efficiency while maintaining the stability and reliability.
- Increase efficiency of load hoisting and other multi-functions. Inching performance of all actions is excellent.
- Strong heat exchange of hydraulic system is designed to improve heat balance and better coping with the climate.

Swing Mechanism

- Internal-mesh swing drive can swing the upperworks by 360°.
- Swing lock: Swing lock device is installed. When the operation is over or the machine is in transport, the upperworks can be locked tightly.
- Swing bearing: single row ball bearing.
- Swing speed: 0-3.5rpm.

Main and Aux. Load Hoist Mechanism

- Main and aux. hoist winches are driven separately by motor via gearbox. Operating winch handle can control the winch to rotate to two directions, which are lifting and lowering of hook. Excellent inching function is equipped on the machine.
- Drums with fold-line grooves can ensure the wire rope reeved in order in multilayers.

Main Load Hoist Mechanism	Drum diameter	520mm
	1st layer rope speed	0~120m/min
	Wire rope diameter	22mm
	Wire rope length of main load hoist	180m
	Rated single line pull	7t
Auxiliary Load Hoist Mechanism	Drum diameter	520mm
	1st layer rope speed	0~120m/min
	Wire rope diameter	22mm
	Wire rope length of auxiliary load hoist	130m
	Rated single line pull	7t

Boom Hoist Mechanism

- Boom hoist winches are driven separately by motor via gearbox. Operating winch handle can control the winch to rotate to two directions, which are lifting and lowering of boom.
- Drums with fold-line grooves can ensure the wire rope reeved in order in multilayers.

Boom hoist mechanism	Drum diameter	290mm
	Single rope speed	0~95m/min
	Wire rope diameter	16mm
	Wire rope length of boom hoist	142m
	Rated single line pull	3.7t

Counterweight

- Counterweight tray and blocks are piled up for easier assembly and transport.
- Total rear counterweight: total 16t.
- Rear counterweight: counterweight tray 6.59t x 1, left counterweight block (1) 2.35t×1, right counterweight block(1) 2.27t×1, left counterweight block (2) 2.43t×1, right counterweight block(2) 2.43t×1.

Lowerworks

- Independent travel driving units are adopted for each side of the crawler, to realize straight walking and turning driven by travel motor through gearbox and drive wheel.

Crawler Extension and Retraction

- The crawlers can extend and retract via cylinders. During Work Mode, the crawlers must be extended, and be retracted during transport with crawlers on.

Crawler Tensioning

- The jack is used to push the guide wheel and insert the shim to adjust crawler tension.

Track Pad

- High-strength alloy cast steel track pad can prolong the service life. They are 762mm wide, and the total amount is 59pcs x 2.

Operating Equipment

- All chords are high-strength steel tubes, and the boom/jib top sheaves are made of high-strength anti-wearing Nylon material protecting wire rope. The hooks are installed with milled welded steel sheave. Pendant cables with quick hitch connector that are easy to assemble are offered as options.

Boom

- Lattice structure. The chord adopts high-strength structural tube and each section is connected through pins.
- Basic boom: 6.5m boom top + 6.5m boom base.
- Boom insert: 3m x 1, 6m x 3, 9m x 2.
- Boom length: 13m~52m.

Fixed Jib

- Lattice structure. The chord adopts high-strength structural tube and each section is connected through pins.
- Basic boom: 3.05m boom top + 3.05m boom base;
- Boom insert: 3.05m x 3;
- Jib length: 6.1m~15.25m;
- Longest boom + jib: 43m boom + 15.25m jib.

Extension Jib

- The extension jib is a welded structure connected to the boom top by pins, used for auxiliary hook.
- Extension jib length: 1.0m.

Hook Block

- 60t hook block, five sheaves;
- 45t hook block, three sheaves;
- 15t hook block, one sheave;
- 9t ball hook.

**Safety Device****Assembly Mode/Work Mode Switch**

- In Assembly Mode, certain safety devices are disabled to facilitate crane assembly;
- In Work Mode, all safety devices activate to protect the operation.

Emergent Stop

- In emergent situation, this button is pressed down to cut off the power supply of the whole machine and all actions stop.

Load Moment Indicator (LMI)

- It is an independent computerized safety control system. LMI can automatically detect the load weight, work radius and boom angle, and present on the display the rated load, actual load, work radius and boom angle. In normal operation, the LMI can make a judgment and cut off automatically if the crane moves towards dangerous direction. It can also perform as a black box to record the lifting information.
- It is composed of monitor, angle sensor, force sensor and other parts.

Over-hoist Protection of the Main/ Auxiliary Load Hoist

- Over-hoist protection device comprises limit switch and weight on boom top, which prevents the hook lifting up too much. When the hook lifts up to the limit height, the limit switch activates, buzzer on the left control panel sends alarm, failure indicator light starts to flash and the hook hoisting action is cut off automatically.

Over-release Protection Device of the Main/Auxiliary Load Hoist

- It is comprised of activator in the drum and proximity switch to prevent over release of wire rope. When the rope is paid out close to the last three wraps, the proximity switch acts, and the system sends alarm through buzzer and show the alarm on the monitor, automatically cutting off the winch action.

Function Lock

- If the function lock level is not in work position, all the other handles won't work, which prevents any mis-operation caused by accidental collision.

Boom Hoist Drum Lock

- Hydraulically controlled lock is installed for boom hoist drum, which needs to unlock by switch before operation, in order to prevent mis-operation of handles and ensure safety during non-work time.

Swing Lock

- Swing Lock can lock the machine.

Boom Limit Device

- When the boom elevation angle reaches the upper limit, the buzzer sounds and boom action is cut off. This protection is two-stage control ensured by both LMI system and travel switch.

Back-stop Device

- Its major components are nesting tubes and spring, in order to buffer the boom backlash and prevent further tipping back.

Boom Angle Indicator

- Pendulum angle indicator is fixed on the side of boom base close to the cab, so as to provide convenience to the operator.

Hook Latch

- The lifting hook is installed with a baffle plate to prevent wire rope from falling off.

Safety Device



Tri-color Load Indicator

- The load indication light has three colors, green, yellow and red, and the real time load status is presented on the display. When the actual load is smaller than 90% of rated load, the green light is on; when the actual load is larger than 90% and smaller than 100%, the yellow light is on, the alarm light flashes and sends out intermittent sirens; when the actual load reaches 100% of rated load, the red light is on, the alarm light flashes and sends out continuous sirens. At this moment, the system will automatically cut off the crane's dangerous operation.

Alarm Light

- When the machine is powered on, the alarm light will work when time comes, so as to warn people around.

Swing Indicator Light

- The swing indicator light flashes during traveling or swing.

Illuminating Light

- The machine is equipped with short-beam light in front of machine, front angle adjustable far-beam light, lamps in operator's cab, lighting devices for night operation, so as to increase the visibility during work.

Rearview Mirror

- It is installed on the left of the operator's cab and at the front handrail of the sheet metal for monitoring the rear part of the machine.

Pharos

- Pharos is mounted on the top of boom/jib to indicate the height.

Anemometer

- It is mounted on the top of boom/jib, and displayed on the monitor in the cab.

Electronic Level Gauge

- It displays the tipping angle of crane on the monitor in real time and sends out alarm to the operator automatically when the angle is out of limit.

Seat Interlock

- If the operator leaves the seat, all control handles will be locked immediately to prevent any mis-operation due to accidental collision.

Engine Power Limit Load Adjustment and Stalling Protection


- The controller monitors the engine power to prevent engine getting stuck and stalling.

Engine Status Monitoring

- The engine status will be presented, such as engine coolant temperature, fuel volume, total work hours, engine oil pressure, engine speed, battery charging and voltage.

Monitoring System

- Remote Monitoring system is a standardized offering to provide functions like GPS locating, GPRS data transfer, machine status inquiry and statistics, operating data monitoring and analysis, remote diagnosis of failures.




SCC600A SANY CRAWLER CRANE 60 TONS LIFTING CAPACITY

QUALITY CHANGES THE WORLD

Technical Parameters


- Page 10 Major Performance & Specifications
- Page 11 Outline Dimension
- Page 12 Transport Dimension
- Page 16 Transport Plan

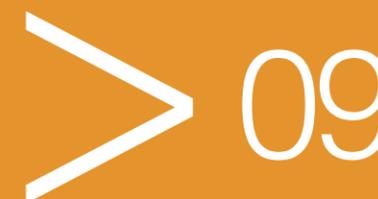


Major Performance & Specifications

Major Performance & Specifications of SCC600A			
Performance Indicators		Unit	Parameter
Boom Configuration	Max. rated lifting capacity	t	60
	Largest lifting moment	t·m	222
	Boom length	m	13~52
Fixed Jib	Max. rated lifting capacity	t	7
	Jib length	m	6.1~15.25
	Longest boom + jib	m	43+15.25
Speed	Rope speed of main/aux. winch (1st layer)	m/min	120
	Rope speed of boom hoist winch	m/min	95
	Swing speed	rpm	0~3.5
	Travel speed	km/h	0~2.0
Wire rope	Main load hoist wire rope: diameter × length	φ mm × m	22×180
	Aux. load hoist wire rope: diameter × length	φ mm × m	22×130
	Rated single line pull of main/aux. hoist wire rope	t	7
Engine	Model/Displacement	\L	6HK1\7.79
	Rated power/revolution speed	kW/ rpm	212/2000
Transport Parameters	Weight of basic boom	t	50
	Rear counterweight	t	16
	Transport weight of basic machine (with crawler frame and boom base)	t	32.3
Other specifications	Machine transport dimension (with crawlers and boom base) L×W×H	mm	12200×3000×3300
	Average ground pressure (basic boom)	MPa	0.065
	Gradeability	%	40


Outline Dimension

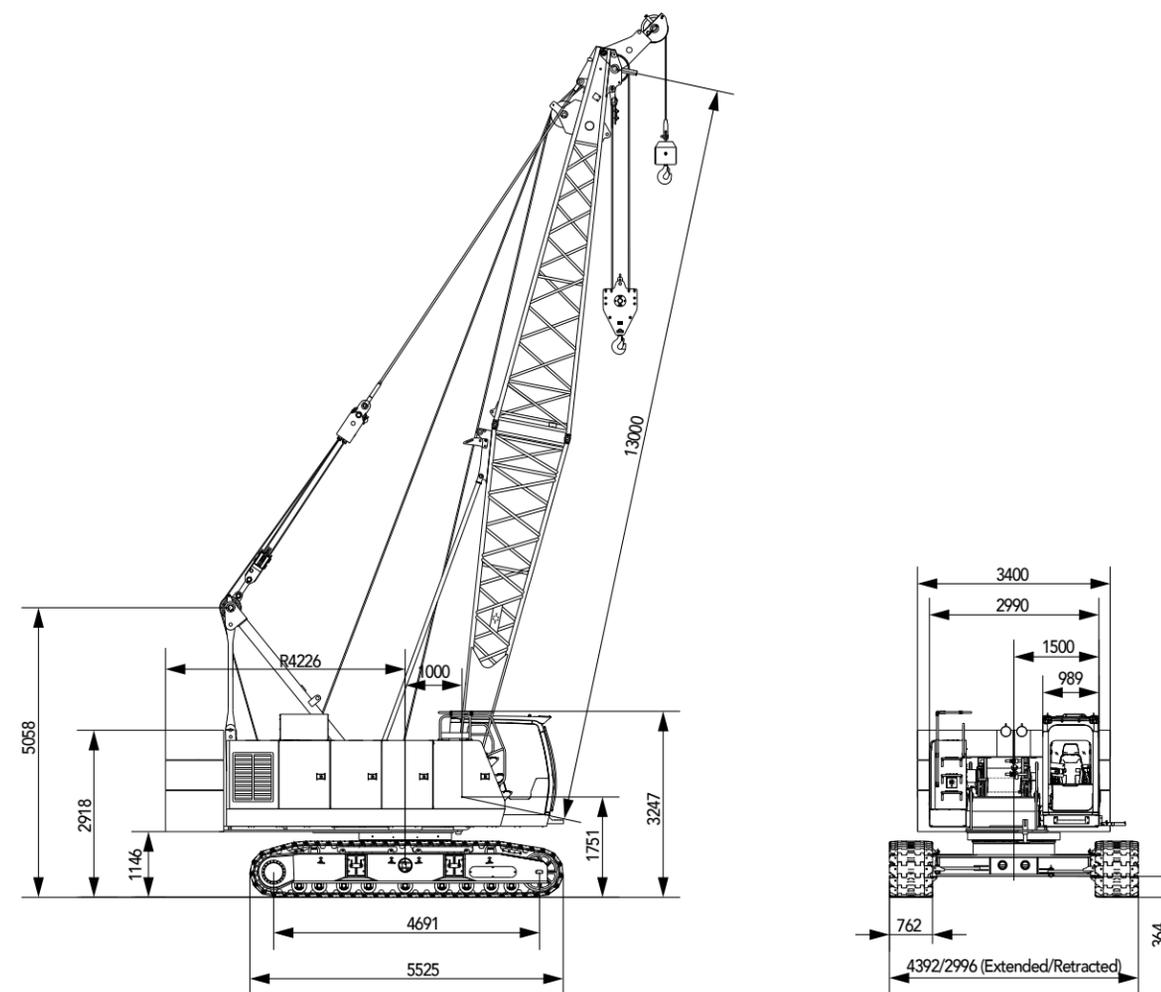


Transport Dimension

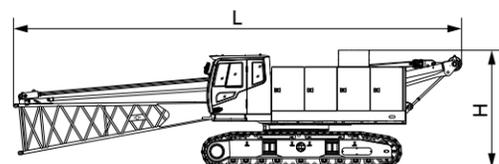


Basic Machine 1 (with boom base and crawler frames)	×1
Length(L)	12.2m
Width(W)	3.0m
Height(H)	3.2m
Weight	32.3t

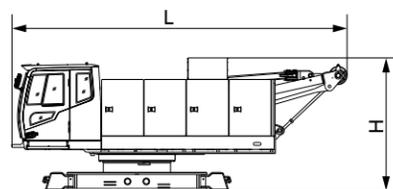


Basic Machine 4	×1
Length (L)	7.2m
Width (W)	3.00m
Height (H)	2.8m
Weight	18.8t

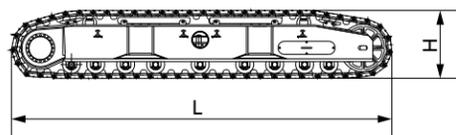


Crawler frame	×2
Length (L)	5.5m
Width (W)	0.9m
Height (H)	0.98m
Weight	6.1t

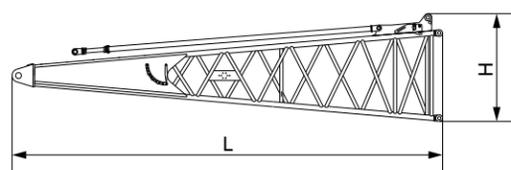

Boom base	×1
Length(L)	6.65m
Width(W)	1.39m
Height(H)	1.65m
Weight	1.35t

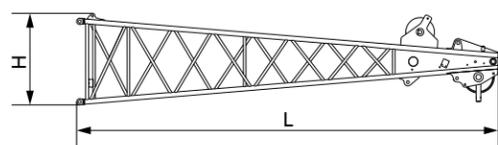


Boom top	×1
Length(L)	6.88m
Width(W)	1.39m
Height(H)	1.48m
Weight	0.9t

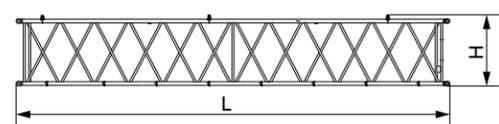


9m boom insert	×2
Length(L)	9.1m
Width(W)	1.39m
Height(H)	1.48m
Weight	0.85t


Transport Dimension

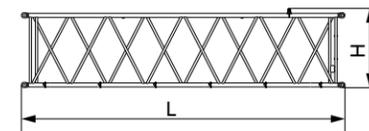


6m boom insert	×3
Length(L)	6.1m
Width(W)	1.39m
Height(H)	1.48m
Weight	0.55t




3m boom insert	×1
Length (L)	3.1 m
Width (W)	1.39m
Height (H)	1.48m
Weight	0.33t

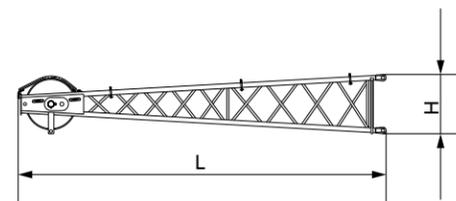


Fixed jib top	×1
Length (L)	3.38m
Width (W)	0.7m
Height (H)	0.55m
Weight	0.15t

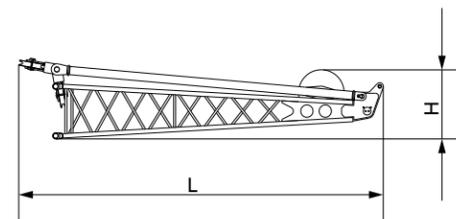

Fixed jib base and strut	×1
Length(L)	3.57m
Width(W)	0.61m
Height(H)	0.78m
Weight	0.25t

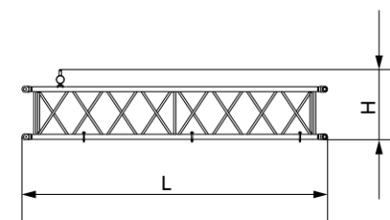


3.05m fixed jib	×3
Length(L)	3.11m
Width(W)	0.62m
Height(H)	0.7m
Weight	0.1t




Boom extension jib	×1
Length(L)	1.35m
Width(W)	0.7m
Height(H)	0.66m
Weight	0.18t


Transport Dimension




Counterweight tray	×1
Length(L)	3.4m
Width(W)	1.03m
Height(H)	0.84m
Weight	6.59t




Left counterweight block 1	×1
Length (L)	1.69m
Width (W)	1.03m
Height (H)	0.64m
Weight	2.35t




Left counterweight block 2	×1
Length (L)	1.69m
Width (W)	1.03m
Height (H)	0.64m
Weight	2.43t



Right counterweight block 1	×1
Length(L)	1.69m
Width(W)	1.03m
Height(H)	0.64m
Weight	2.27t




Right counterweight block 2	×1
Length(L)	1.69m
Width(W)	1.03m
Height(H)	0.64m
Weight	2.43t

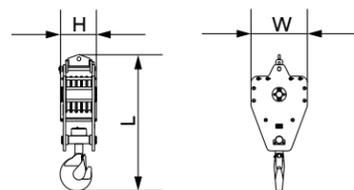


60T hook	×1
Length(L)	1.65m
Width(W)	0.69m
Height(H)	0.39m
Weight	0.65t


Transport Dimension

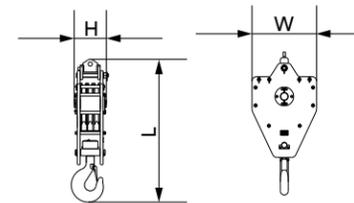

45T hook	×1
Length(L)	1.52m
Width(W)	0.69m
Height(H)	0.37m
Weight	0.48t



15T hook	×1
Length (L)	1.34m
Width (W)	0.6m
Height (H)	0.34m
Weight	0.28t



9T ball hook	×1
Length (L)	0.75m
Width (W)	0.37m
Height (H)	0.37m
Weight	0.255t


Note:

- 1.The transport dimensions of each part in the table are schematic, not proportional to the real parts. The dimensions are designed value without package considered.
- 2.The Weight is designed value that the actual manufactured part may deviate a little


Transport Plan

Transport with crawler frames

Trailer 1	
Part(s)	▪ Basic Machine
Weight	▪ 32.3t

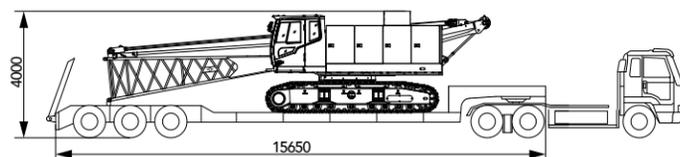

Trailer 2	
Part(s)	<ul style="list-style-type: none"> ▪ 9m boom x2 ▪ 6m boom x3 ▪ 3m boom x1 ▪ Boom top x1 ▪ Boom extension jib x1 ▪ 3.05m fixed jib x3 ▪ Fixed jib base and strut x1 ▪ Fixed jib top ▪ Counterweight tray x1 ▪ Left counterweight block1 x1 ▪ Right counterweight block 1x1 ▪ Left counterweight block2 x1 ▪ Right counterweight block 2x1 ▪ 60t hook x1 ▪ 45t hook x1 ▪ 15t hook x1 ▪ 9t hook x1
Weight	▪ 23.2t

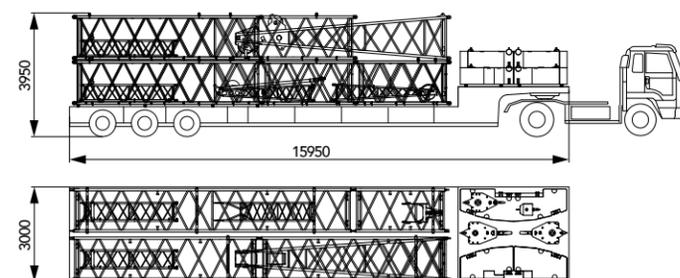


SCC600A SANY CRAWLER CRANE 60 TONS LIFTING CAPACITY

QUALITY CHANGES THE WORLD


Boom Combination

- Page 19 H Configuration
- Page 22 FJ Configuration

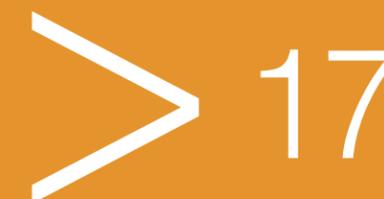

17


Boom Combination

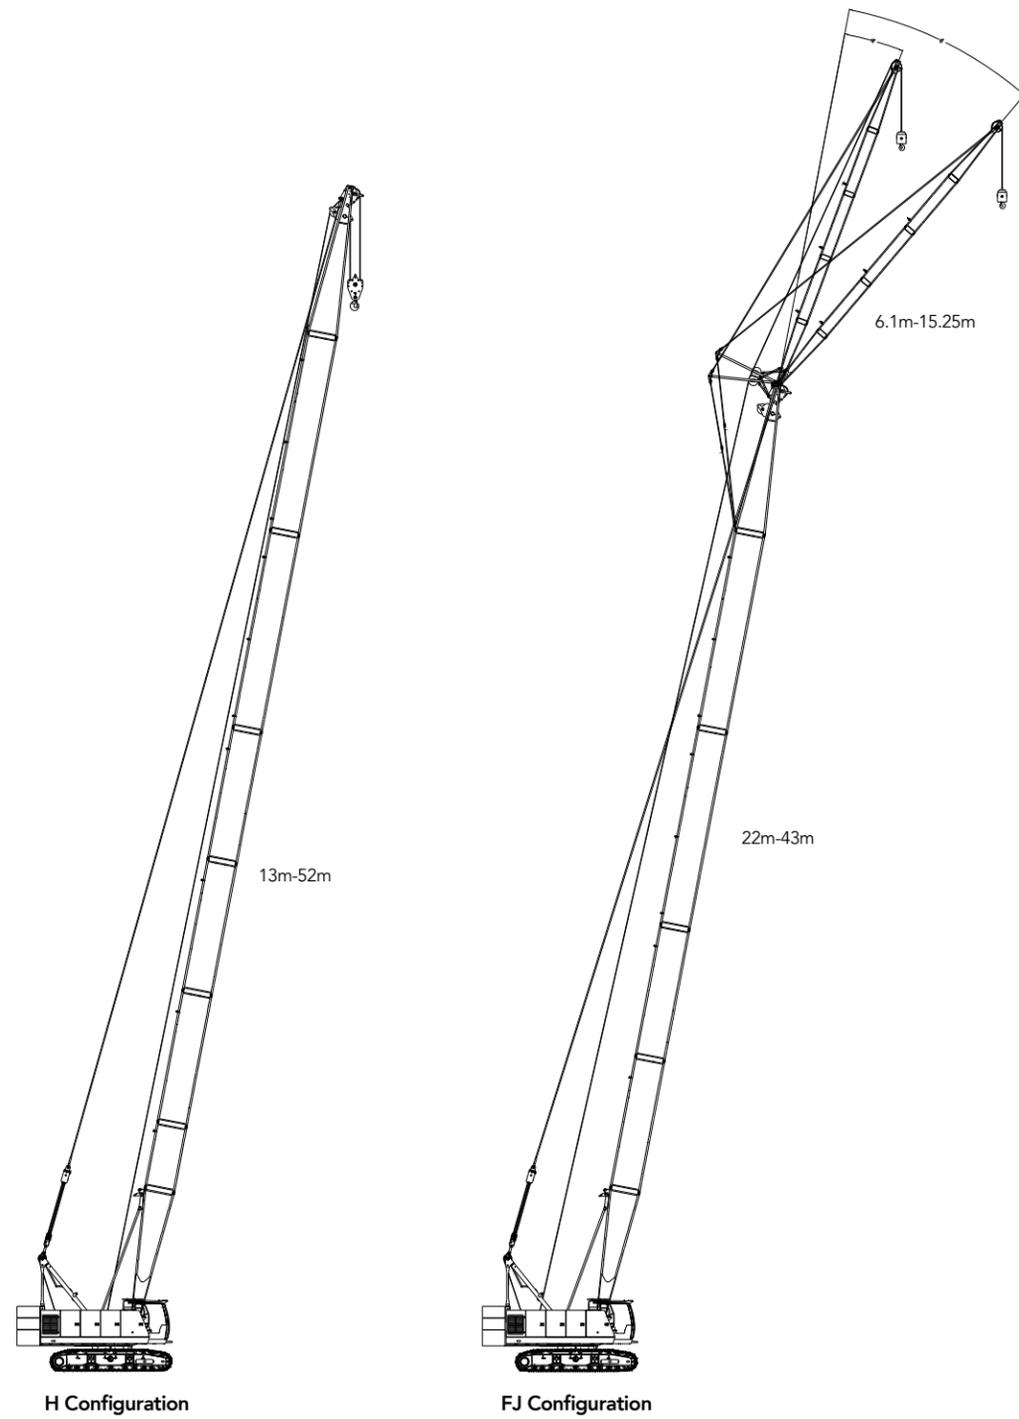


H Boom Combination

Boom Combination in H Configuration

Boom length (m)	Insert		
	3m	6m	9m
13	-	-	-
16	1	-	-
19	-	1	-
22	1	1	-
25	-	-	1
28	1	2	-
31	-	1	1
34	1	1	1
37	-	-	2
40	1	3	-
43	-	2	1
46	1	2	1
49	-	3	2
52	1	3	2

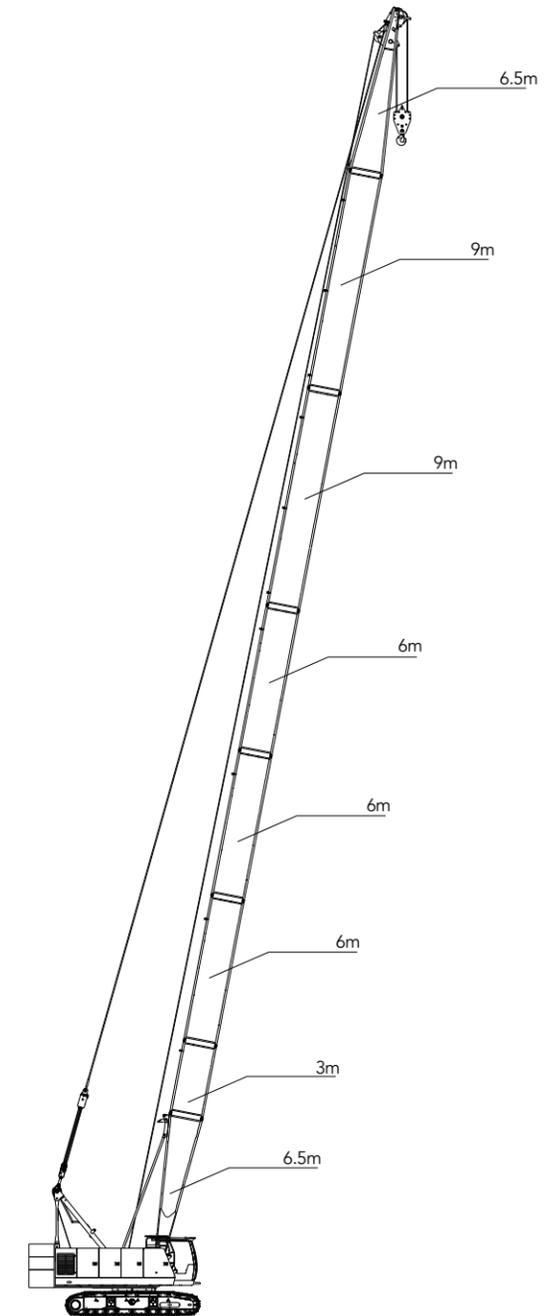

Working Radius in H Configuration

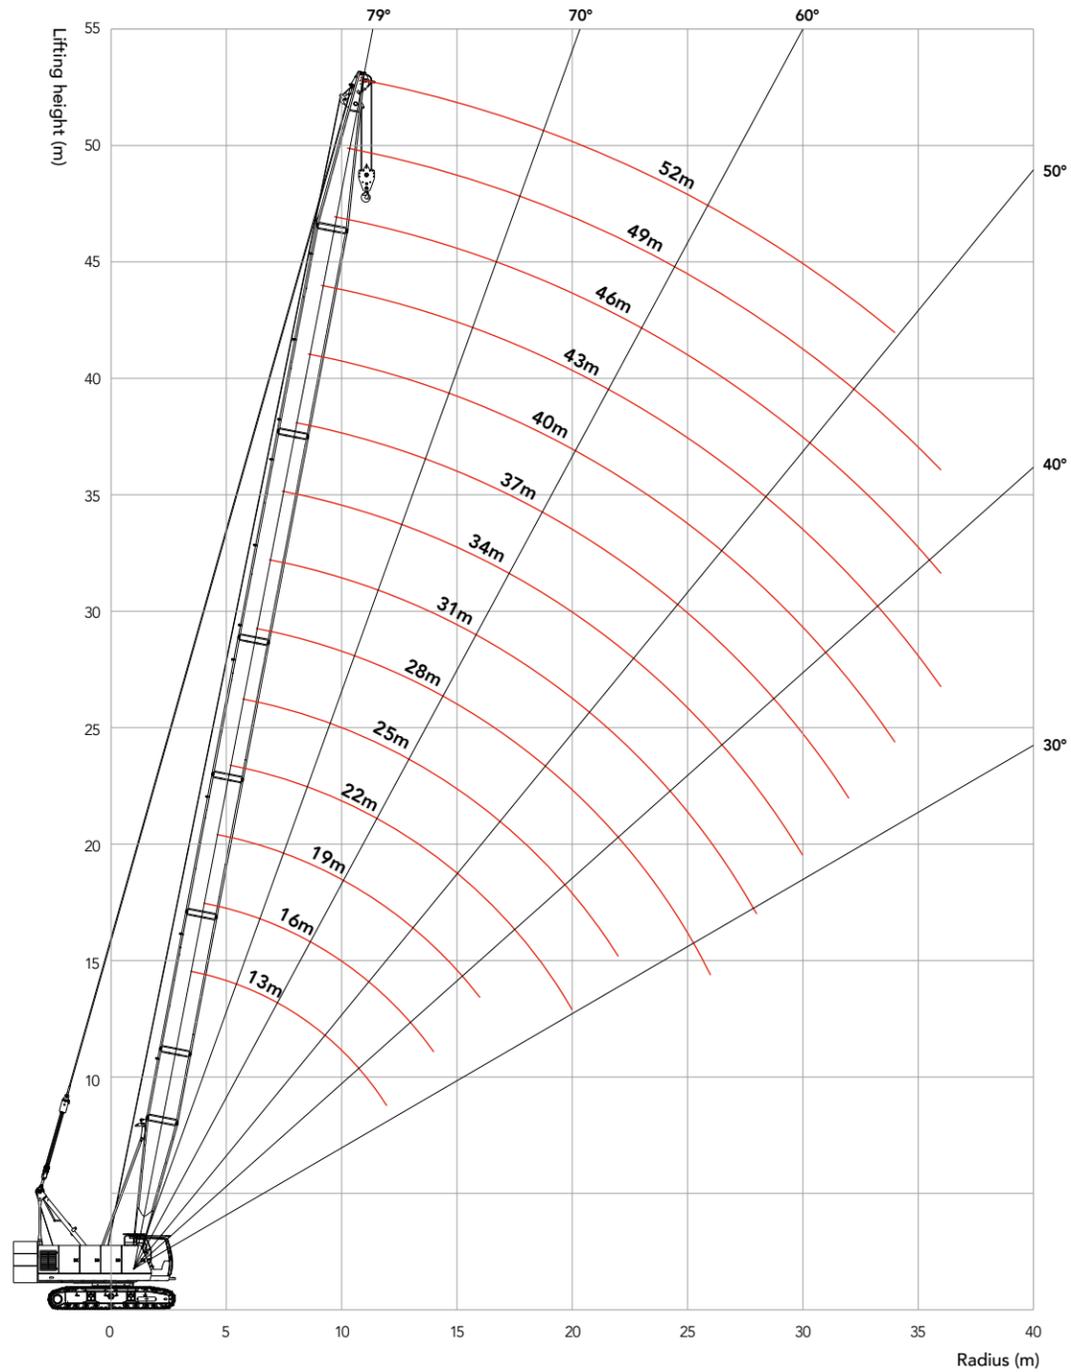

Load Chart of H Configuration


Unit: t

SCC600A Crawler Crane –H Configuration																
Rear counterweight 16t																
R/BL (m)	13	16	19	22	25	28	31	34	37	40	43	46	49	52	R/BL (m)	
3.7	60														3.7	
4	50.2	48.2													4	
4.5	42.5	41.8	40.2												4.5	
5	37.5	36	35	33.2											5	
5.5	32.5	31.9	31	30.2	28.2										5.5	
6	28.5	28.3	27.5	27.2	26.2	25.2									6	
7	22.9	22.7	22.5	22.2	21.7	21.2	20.5								7	
8	19.2	19	18.7	18.5	18.5	18	17.5	17.1	16.7						8	
9	16.1	15.7	15.7	15.6	15.5	15.4	14.8	14.2	14	13.2	12.8				9	
10	14.2	14	13.9	13.9	13.7	13.7	13.5	13.2	12.8	12.5	12.1	11.7	11.3		10	
12	11.3	11.2	11.1	11	10.9	10.8	10.8	10.5	10.3	10	9.6	9.3	9.2	9.2	12	
14		9.3	9.2	9.1	9	8.8	8.8	8.6	8.5	8.2	8	7.7	7.4	7.4	14	
16			7.8	7.7	7.6	7.5	7.4	7.2	7.1	6.9	6.9	6.6	6.4	6.2	16	
18				6.6	6.5	6.5	6.4	6.2	6.1	5.9	5.8	5.5	5.3	5.1	18	
20				5.6	5.6	5.5	5.5	5.3	5.2	4.9	4.9	4.7	4.4	4.3	20	
22					4.8	4.8	4.6	4.5	4.3	4.2	4.1	3.9	3.7	3.6	22	
24						4.2	4	3.9	3.7	3.6	3.5	3.3	3.2	3	24	
26							3.6	3.6	3.4	3.3	3.2	3	2.9	2.7	2.5	26
28								3	3	2.9	2.7	2.5	2.4	2.3	2.1	28
30									2.6	2.5	2.3	2.1	2	1.9	1.7	30
32										2.1	2	1.8	1.7	1.6	1.4	32
34											1.7	1.5	1.4	1.3	1.2	34
36												1.1	1	0.9		36

- Notes: Rated capacity of crawler crane
- ① The rated capacity in the load charts is calculated when the crane is parking on firm and level ground, lifting the load slowly and steadily.
 - ② The shaded values are determined by strength.
 - ③ The rated capacity values in the load charts are only valid when wind speed is lower than 9.8m/s.
 - ④ The rated capacity in the load charts includes the weight of hook, wire rope and other riggings; therefore, the actual rated capacity shall deduct the weight of these components.
 - ⑤ The crawlers must be extended during lifting.
 - ⑥ The values in the load charts are valid for 360° swing.


Boom Combination in FJ

Boom Combination of FJ Configuration	
Jib Length (m)	Insert
6.1	-
9.15	1
12.2	2
15.25	3

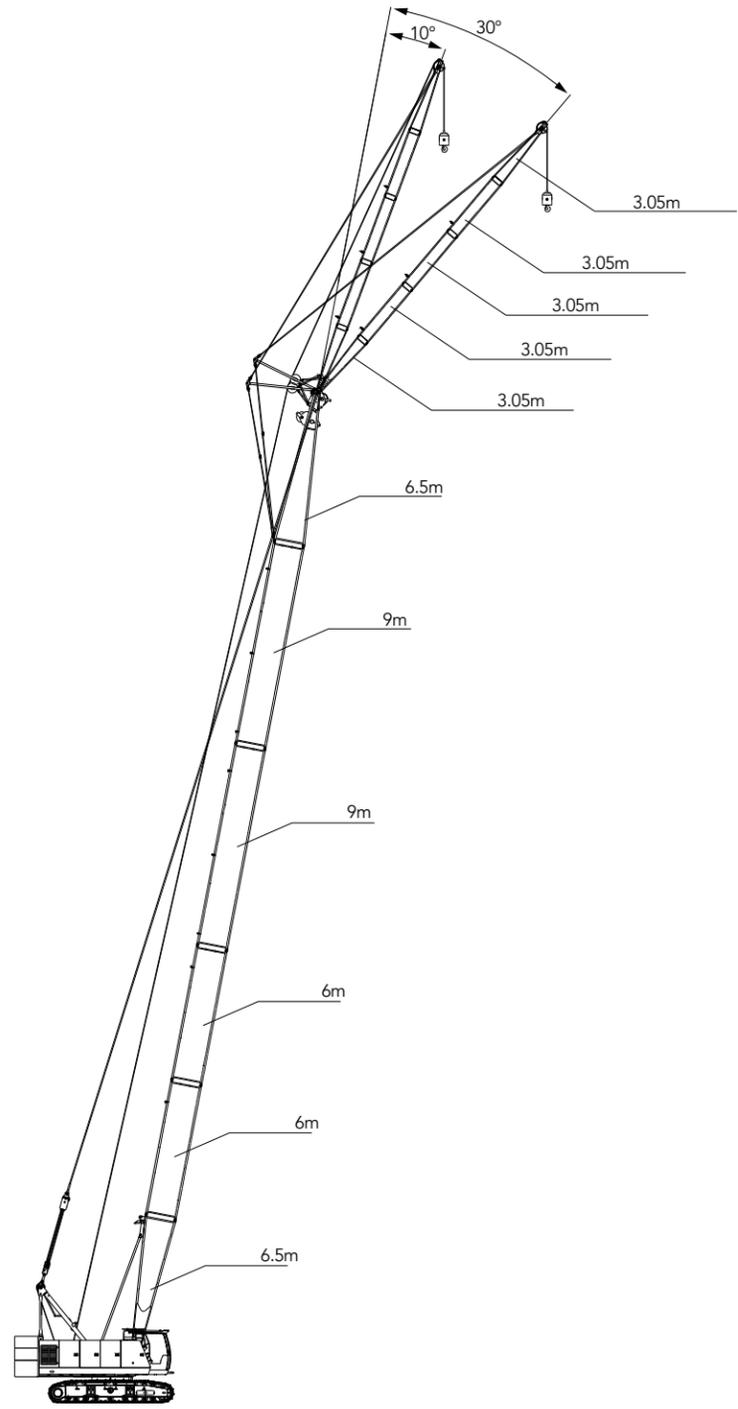

Longest boom + jib: 43m+15.25m

Working Radius in FJ Configuration

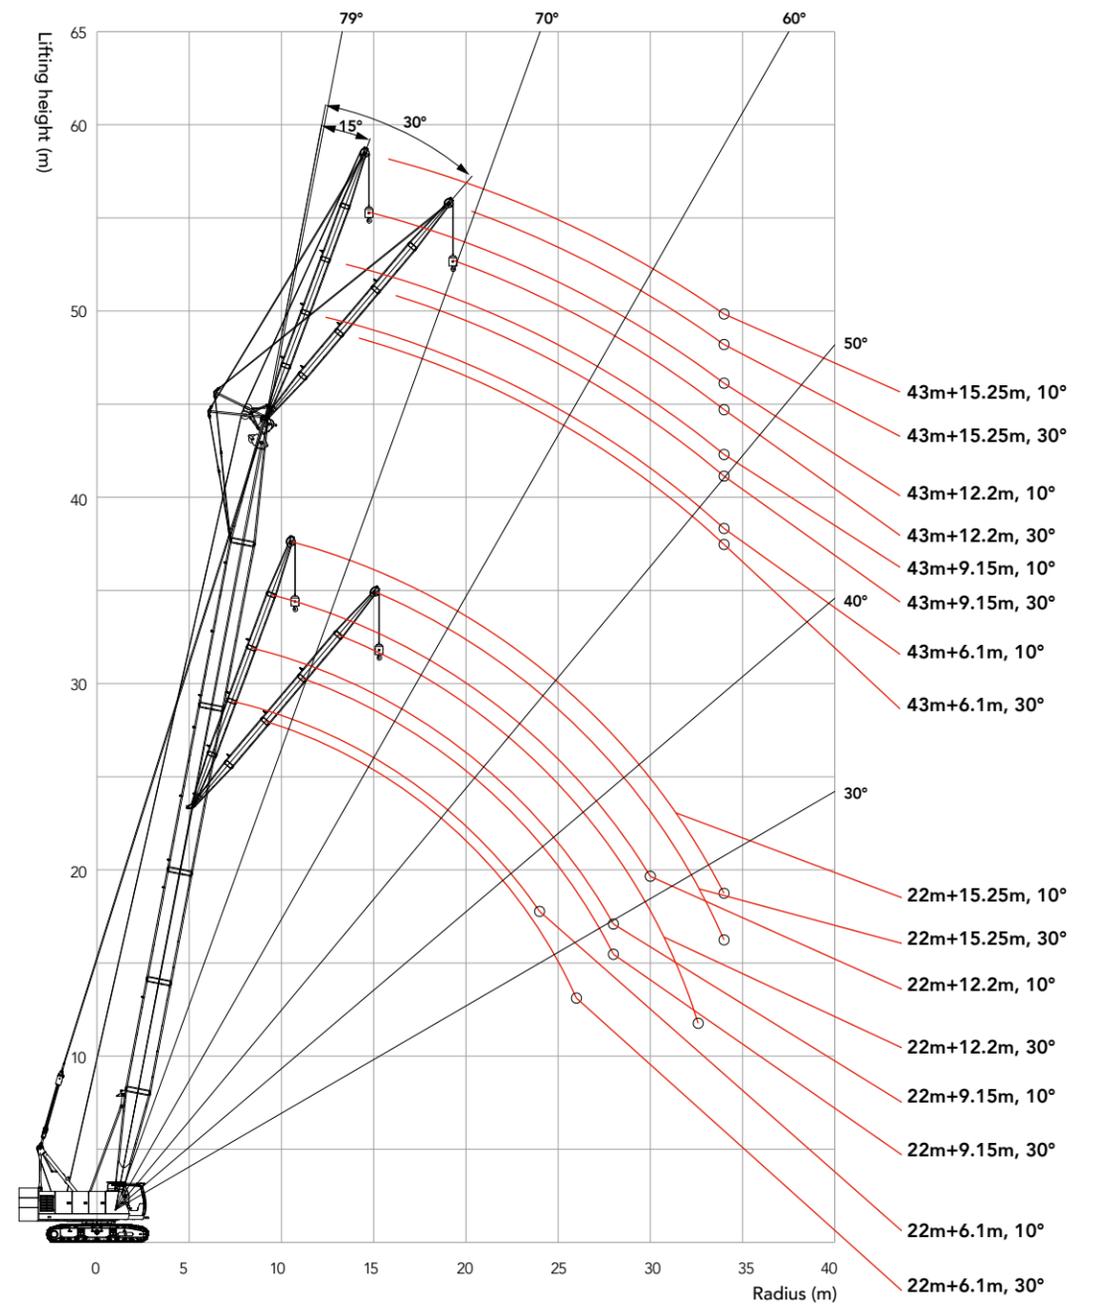

Load Chart of FJ Configuration

SCC600A Crawler Crane – FJ Load Chart 1/8										
Boom 22m Fixed jib 6.1m-15.25m Rear counterweight 16t										
Jib Length (m) R(m)	Jib angle	6.1		9.15		12.2		15.25		Jib Length (m) R(m)
		10°	30°	10°	30°	10°	30°	10°	30°	
8		7.00	9.8m × 6.5	9.2m × 7						8
10		7.00	6.30	7.00		10.3m × 4.5		11.4m × 4.5		10
12		7.00	6.00	7.00	4.80	4.50		4.40		12
14		7.00	5.50	7.00	4.65	4.50	4.00	4.40		14
16		7.00	5.00	6.50	4.45	4.50	3.50	4.00	3.50	16
18		6.00	5.00	5.80	4.25	4.15	3.50	4.00	3.25	18
20		4.90	5.00	5.00	4.05	3.95	3.50	3.85	3.05	20
22		4.30	4.35	4.35	3.85	3.85	3.50	3.60	2.90	22
24		3.90	4.00	4.00	3.50	3.65	3.25	3.35	2.85	24
26			3.85	3.85	3.45	3.55	3.20	3.25	2.75	26
28				3.05	3.05	3.05	3.05	3.05	2.70	28
30						2.75	2.75	2.75	2.65	30
32							2.50	2.50	2.20	32
34							32.6m × 2.5	2.30	2.15	34
Counterweight(t)		16	16	16	16	16	16	16	16	Counterweight(t)

Note: The shaded area is determined by the boom strength.

Load Chart of FJ Configuration

SCC600A Crawler Crane – FJ Load Chart 2/8										
Boom 25m Fixed jib 6.1m-15.25m Rear counterweight 16t										
Jib Length (m) R(m)	Jib angle	6.10		9.15		12.20		15.25		Jib Length (m) R(m)
		10°	30°	10°	30°	10°	30°	10°	30°	
8		8.6m × 7								8
10		7.00	10.4m × 6	7.00		10.9m × 4.5				10
12		7.00	6.00	7.00	12.5m × 4.8	4.50		12.1m × 4.5		12
14		7.00	5.50	7.00	4.65	4.50	14.5m × 4.0	4.40		14
16		7.00	5.50	6.50	4.45	4.35	3.50	4.25	16.6m × 3.5	16
18		6.00	5.00	5.50	4.25	4.15	3.50	4.00	3.25	18
20		4.90	5.00	5.00	4.05	3.95	3.50	3.85	3.05	20
22		4.30	4.35	4.35	3.85	3.85	3.50	3.60	2.90	22
24		3.90	4.00	4.00	3.50	3.65	3.25	3.35	2.85	24
26		3.80	3.85	3.85	3.45	3.55	3.20	3.25	2.75	26
28		3.00	3.05	3.05	3.05	3.05	3.05	3.05	2.70	28
30				2.65	2.75	2.75	2.75	2.75	2.65	30
32					2.40	2.40	2.40	2.40	2.20	32
34							2.25	2.20	2.15	34

Note: The shaded area is determined by the boom strength.

Load Chart of FJ Configuration

SCC600A Crawler Crane – FJ Load Chart 3/8										
Boom 28m Fixed jib 6.1m-15.25m Rear counterweight 16t										
Jib Length (m) R(m)	Jib angle	6.1		9.15		12.2		15.25		Jib Length (m) R(m)
		10°	30°	10°	30°	10°	30°	10°	30°	
8		9.3m × 7								8
10		7.00	11.1m × 6	10.4m × 7		11.6m × 4.5				10
12		7.00	6.00	7.00	13.1m × 5.0	4.50		12.7m × 4.0		12
14		7.00	5.50	7.00	4.80	4.50	15.1m × 3.8	3.50		14
16		7.00	5.50	6.50	4.55	4.30	3.80	3.50	17.2m × 3.2	16
18		6.00	5.00	5.50	4.05	4.05	3.70	3.50	3.20	18
20		5.00	5.00	5.00	3.85	3.95	3.55	3.45	3.05	20
22		4.50	4.50	4.50	3.70	3.85	3.45	3.25	2.95	22
24		4.00	4.00	4.00	3.50	3.65	3.25	3.35	2.85	24
26		3.80	3.85	3.85	3.45	3.55	3.20	3.25	2.75	26
28		3.00	3.05	3.05	3.05	3.05	3.05	3.05	2.70	28
30		2.60	2.65	2.65	2.75	2.75	2.75	2.75	2.65	30
32		31.3m × 2.3		2.30	2.30	2.35	2.40	2.35	2.20	32
34				2.05	2.10	2.10	2.15	2.10	2.15	34

Note: The shaded area is determined by the boom strength.

Load Chart of FJ Configuration

SCC600A Crawler Crane – FJ Load Chart 4/8										
Boom 31m Fixed jib 6.1m-15.25m Rear counterweight 16t										
Jib Length (m) R(m)	Jib angle	6.10		9.15		12.20		15.25		Jib Length (m) R(m)
		10°	30°	10°	30°	10°	30°	10°	30°	
10		7.00	11.7m × 6	11.0m × 7						10
12		7.00	6.00	7.00		12.2m × 4.5		13.3m × 4.0		12
14		7.00	5.50	7.00	4.75	4.50		4.00		14
16		7.00	5.50	6.50	4.50	4.50	4.00	4.00		16
18		6.00	5.50	5.50	4.35	4.35	3.85	4.00	3.20	18
20		4.80	4.85	4.85	4.25	4.15	3.70	3.85	3.15	20
22		4.40	4.45	4.45	4.05	3.95	3.50	3.65	3.00	22
24		4.00	4.05	4.05	3.85	3.80	3.35	3.45	2.85	24
26		3.80	3.85	3.85	3.45	3.55	3.20	3.25	2.75	26
28		3.00	3.05	3.05	3.05	3.05	3.05	3.05	2.70	28
30		2.60	2.65	2.65	2.75	2.75	2.75	2.75	2.65	30
32		2.20	2.25	2.25	2.25	2.35	2.35	2.30	2.30	32
34			1.95	1.95	2.00	2.00	2.10	2.05	2.15	34

Note: The shaded area is determined by the boom strength.

Load Chart of FJ Configuration

SCC600A Crawler Crane – FJ Load Chart 5/8										
Boom 34m Fixed jib 6.1m-15.25m Rear counterweight 16t										
Jib Length (m) R(m)	6.1		9.15		12.2		15.25		Jib Length (m) Jib angle R(m)	
	10°	30°	10°	30°	10°	30°	10°	30°	Jib angle	R(m)
10	10.5m × 7		11.7m × 7							10
12	7.00	12.3m × 6	7.00		12.8m × 4.5		13.9m × 3.5			12
14	7.00	6.00	7.00	14.4m × 4.8	4.50		3.50			14
16	7.00	5.50	6.50	4.75	4.50	16.4m × 3.85	3.50			16
18	5.50	5.50	5.50	4.65	4.35	3.75	3.50	18.4m × 3.2		18
20	4.80	4.85	4.85	4.45	4.15	3.55	3.50	3.15		20
22	4.30	4.35	4.35	4.20	3.95	3.45	3.35	3.05		22
24	3.80	3.85	3.85	3.90	3.75	3.35	3.30	2.95		24
26	3.40	3.45	3.45	3.45	3.45	3.15	3.20	2.85		26
28	3.00	3.05	3.05	3.05	3.05	3.05	3.05	2.80		28
30	2.60	2.65	2.65	2.75	2.75	2.75	2.75	2.65		30
32	2.20	2.25	2.25	2.25	2.35	2.35	2.30	2.35		32
34	1.80	1.85	1.85	1.95	1.90	2.00	1.95	2.05		34

Note: The shaded area is determined by the boom strength.

Load Chart of FJ Configuration

SCC600A Crawler Crane – FJ Load Chart 6/8										
Boom 37m Fixed jib 6.1m-15.25m Rear counterweight 16t										
Jib Length (m) R(m)	6.10		9.15		12.20		15.25		Jib Length (m) Jib angle R(m)	
	10°	30°	10°	30°	10°	30°	10°	30°	Jib angle	R(m)
10	11.1m × 7									10
12	7.00	12.9m × 6	7.00		13.4m × 4.5					12
14	7.00	6.00	7.00	15.0m × 4.8	4.50		14.6m × 4.0			14
16	6.50	5.50	6.50	4.80	4.50	17.0m × 3.8	4.00			16
18	5.50	5.50	5.50	4.60	4.50	3.75	3.80	19.1m × 3.2		18
20	4.60	4.65	4.65	4.45	4.20	3.65	3.60	3.15		20
22	4.10	4.15	4.15	4.25	4.05	3.45	3.50	3.05		22
24	3.60	3.65	3.65	3.75	3.75	3.35	3.35	2.95		24
26	3.20	3.25	3.25	3.35	3.35	3.25	3.20	2.85		26
28	2.90	2.95	2.95	2.95	2.95	2.95	3.00	2.80		28
30	2.50	2.55	2.55	2.60	2.65	2.65	2.60	2.70		30
32	2.20	2.25	2.25	2.25	2.35	2.35	2.30	2.30		32
34	1.65	1.75	1.75	1.85	1.80	1.90	1.95	2.05		34

Note: The shaded area is determined by the boom strength.

Load Chart of FJ Configuration

SCC600A Crawler Crane – FJ Load Chart 7/8										
Boom 40m Fixed jib 6.1m-15.25m Rear counterweight 16t										
Jib Length (m) R(m)	6.1		9.15		12.2		15.25		Jib Length (m) R(m)	
	Jib angle 10°	30°	10°	30°	10°	30°	10°	30°	Jib angle	R(m)
12	7.00	13.6m × 6	12.9m × 7							12
14	7.00	6.00	7.00	15.6m × 4.8	14.8m × 4.5		15.2m × 3.5			14
16	6.50	5.50	6.50	4.50	4.50		3.50			16
18	5.50	5.50	5.50	4.50	4.35	4.00	3.45	19.7m × 3.2		18
20	4.50	4.55	4.55	4.35	4.20	3.85	3.35	3.20		20
22	4.00	4.05	4.05	4.15	4.05	3.70	3.25	3.10		22
24	3.60	3.65	3.65	3.70	3.55	3.50	3.15	3.00		24
26	3.15	3.20	3.20	3.25	3.15	3.35	3.00	2.90		26
28	2.80	2.85	2.85	2.85	2.85	2.85	2.75	2.80		28
30	2.45	2.50	2.50	2.55	2.45	2.55	2.45	2.55		30
32	2.10	2.15	2.15	2.25	2.15	2.25	2.15	2.30		32
34	1.85	1.90	1.90	1.95	1.85	1.95	1.95	2.05		34

Note: The shaded area is determined by the boom strength.

Load Chart of FJ Configuration

SCC600A Crawler Crane – FJ Load Chart 8/8										
Boom 43m Fixed jib 6.1m-15.25m Rear counterweight 16t										
Jib Length (m) R(m)	6.10		9.15		12.20		15.25		Jib Length (m) R(m)	
	Jib angle 10°	30°	10°	30°	10°	30°	10°	30°	Jib angle	R(m)
12	12.4m × 7		13.5m × 7							12
14	7.00	14.2m × 6	7.00		14.7m × 4.5		15.8m × 3.5			14
16	7.00	5.50	6.50	16.2m × 4.8	4.50		16.8m × 3.5			16
18	5.50	5.50	5.50	4.80	4.35	19.3m × 3.8	3.35			18
20	4.45	4.50	4.50	4.50	4.20	3.80	3.25	20.3m × 3.2		20
22	3.95	4.00	4.00	4.20	4.05	3.70	3.15	3.15		22
24	3.50	3.55	3.55	3.65	3.55	3.50	3.05	3.05		24
26	3.10	3.15	3.15	3.15	3.10	3.20	2.85	2.95		26
28	2.70	2.75	2.75	2.75	2.75	2.85	2.75	2.85		28
30	2.40	2.45	2.45	2.35	2.35	2.50	2.40	2.55		30
32	2.00	2.05	2.05	2.10	2.05	2.15	2.05	2.25		32
34	1.70	1.75	1.75	1.85	1.75	1.90	1.75	2.05		34

Note: The shaded area is determined by the boom strength.

Notes: Rated capacity of crawler crane

- ① The rated capacity in the load charts is calculated when the crane is parking on firm and level ground, lifting the load slowly and steadily.
- ② The shaded values are determined by strength.
- ③ The rated capacity values in the load charts are only valid when wind speed is lower than 9.8m/s.
- ④ The rated capacity in the load charts includes the weight of hook, wire rope and other riggings; therefore, the actual rated capacity shall deduct the weight of these components.
- ⑤ The crawlers must be extended during lifting.
- ⑥ The values in the load charts are valid for 360° swing.



Zhejiang SANY Equipment Co., Ltd.

SANY Industrial Park, No. 2087 Daishan Road, Wuxing District, Huzhou City,
Zhejiang Province, P. R. of China Zip 313028

After-sales Service 400 887 8318

Consulting 400 887 9318

— Agent information —

Due to updated technology, the technical parameters and configurations are subject to change without prior notice. The machine in the picture may include additional equipment. This album is for reference only, subject to the object.

All rights reserved for Sany, without the written permission of Sany, the contents of any part of this content shall not be copied or copied for any purpose.

© Printed in January 2018 in China

www.sany.com.cn



Please scan the official
WeChat account of Sany
for more information.